



APPLIED MEASUREMENTS LTD.
Transducer Specialists...

+44 (0) 118 981 7339


info@appmeas.co.uk

<https://appmeas.co.uk>

CDFT Micro Button Load Cell

Key Features:

- Capacities 10N to 250N
- Sealed to IP53
- Only 9mm in Diameter and 2.9mm in Height
- Integral Load Button
- Wide Temperature Range: -40°C to +125°C
- Accuracy $<\pm 0.25\%/RC$
- Robust Construction
- 3 Year Warranty

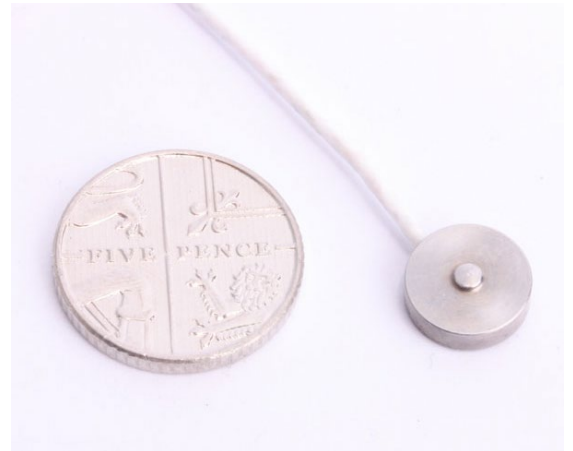

For the measurement of compressive forces when space is extremely limited.

The [CDFT micro button load cells](#) are designed for the measurement of compressive forces where space is at an absolute premium. Its ultra-small size means it can be fitted in the smallest of spaces and is often retrofitted. It is suited for both force measurement and weighing applications alike. It is used in many industrial process measurement applications for monitoring and control purposes.

The CDFT micro button load cell is the smallest button load cell we offer at a tiny 9mm in diameter and 2.9mm in height. For measuring higher forces please see our [CDFM3 miniature button load cell](#) available in capacities from 0-100N up to 0-20kN.

The CDFT series of micro button load cells can be supplied with a range of our transducer instrumentation such as digital indicators, signal conditioners, digitisers or telemetry systems and can be supplied calibrated as a complete system, please speak to our [technical sales team](#).

Options:

- Special Sizes Available on Request
- Other Ranges Available on Request
- Different Temperature Compensation Ranges Available
- Shunt Calibration Facility
- High Temperature Versions
- Vacuum Application Versions
- USB Versions (via DSC-USB)
- Single or Multi-Channel PC-Based Monitoring & Data Logging System
- TEDS (Transducer Electronic data Sheet)
- TEDS Allows Plug & Play with TEDS Enabled Instrumentation
- Wireless Version (via T24 instrumentation)

Applications:

- Force Measurement & Weighing Applications
- Industrial Process Measurement Applications
- Research & Development Applications
- Press Force Monitoring
- Batch Weighing
- Variable Force Control
- Load and Compression Sensing
- Assembly Line Force Measurement
- Pumps
- Hoist and Winch Loads
- Robotics and Effectors
- Micro Component Assembly Tools & Machinery
- Keyboard Button and Telephone Control
- Mechanical Switches



APPLIED MEASUREMENTS LTD.

Transducer Specialists...

+44 (0) 118 981 7339

info@appmeas.co.uk

<https://appmeas.co.uk>

Specification:

Rated Capacity (RC)	N	0-10, 0-25, 0-50, 0-100, 0-200, 0-250
Operating Modes	Compression Only	
Sensitivity (RO)	mV/V	0.5 to 2 nominal (see dimension table)
Zero Balance/Offset	±%/Rated Output	<1.0
Non-Linearity	±%/Rated Output	<0.25
Hysteresis	%/Rated Output	<0.25
Repeatability	%/Rated Output	<0.1
Temperature Effect on Zero	±%/Rated Output/ °C	<0.01
Temperature Effect on Sensitivity	±%/Applied Load/ °C	<0.02
Input Resistance	Ohms	1000 nominal
Output Resistance	Ohms	1000 nominal
Insulation Resistance	Megohms	>5000 @ 50Vdc
Excitation Voltage	Volts AC or DC	5 recommended (2-10 acceptable)
Operating Temperature Range	°C	-40 to +125 (cell only)
Compensated Temperature Range	°C	0 to +100
Storage Temperature Range	°C	-40 to +125
Safe Overload	% of Rated Capacity	150
Ultimate Overload	% of Rated Capacity	300
Deflection @ Rated Capacity	mm	See dimension table
Fundamental Resonant Frequency*	kHz	See dimension table
IP Rating (Environmental Protection)		IP53
Weight	grams	~2 (excluding cable)
Fatigue Life		10 ⁸ cycles typical (10 ⁹ cycles on fatigue-rated version)
Cable Length (as standard)	metres	2 (1.5m to compensation module + 0.5m tail)
Cable Type		Ø1.35 screened PTFE from cell, Ø3.3 screened PVC from compensation module
Construction Materials		Aluminium + Stainless Steel (10N), Stainless Steel (25N upwards)
Resolution		1 part in 250,000 (with appropriate instrumentation)

*The resonant frequency is calculated with the body of the load cell attached to a large plate, ensuring that only the sensing element oscillates: This is vital to achieve the highest natural frequency and subsequent frequency response.

Wiring Diagram:

Wire	Designation
Red	+ve excitation
Blue	-ve excitation
Green	+ve signal
Yellow	-ve signal
Screen	To ground - not connected to load cell body




APPLIED MEASUREMENTS LTD.
Transducer Specialists...

+44 (0) 118 981 7339

info@appmeas.co.uk

<https://appmeas.co.uk>

Dimensions (mm):

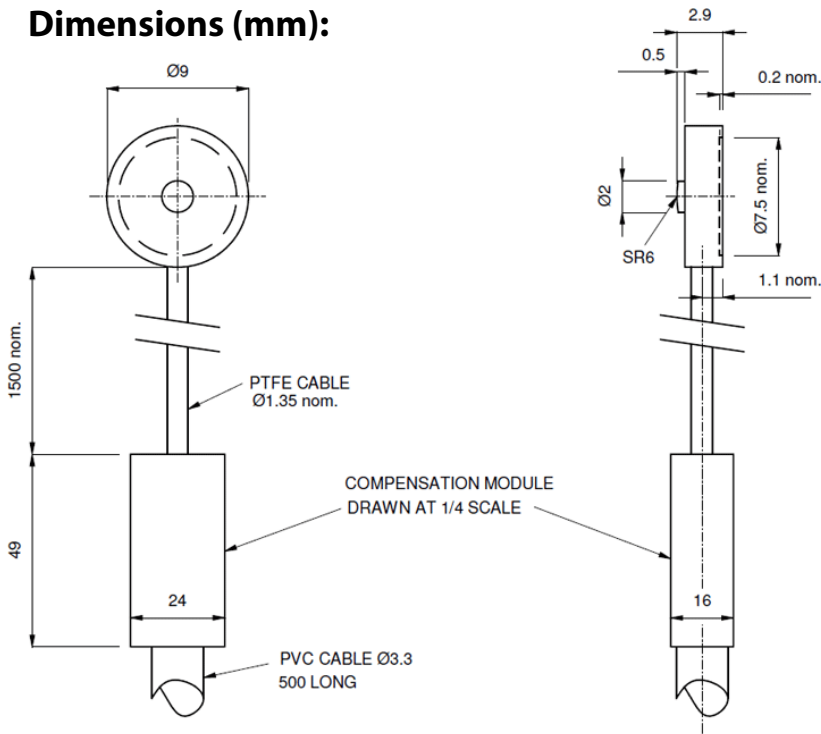

For higher or lower measuring ranges look at our [CDFM3](#) which is available in capacities from 0-100N up to 0-20kN

Sensitivity @ FS (nominal)	Capacity	Deflection @ FS (nominal)	Resonant Frequency
0.5mV/V	10N	0.005	7kHz
0.5mV/V	25N	0.005	7.5kHz
1.0mV/V	50N	0.010	7.5kHz
2.0mV/V	100N	0.020	7.5kHz
1.5mV/V	200N	0.010	11.5kHz
2.0mV/V	250N	0.012	11.5kHz

Ordering Codes:

Core Product	Capacity (inc Engineering Units)	Cable Length (m)	Specials Code	Example Result
CDFT	10N	002	000	CDFT-10N-002-000
CDFT	25N	002	000	CDFT-25N-002-000
CDFT	50N	002	000	CDFT-50N-002-000
CDFT	100N	002	000	CDFT-100N-002-000
CDFT	200N	002	000	CDFT-200N-002-000
CDFT	250N	002	000	CDFT-250N-002-000

Associated Products:



[TR150 Handheld Indicator](#)



[T24 Wireless Telemetry Range](#)



[Intuitive4-L Panel-Mount Indicator](#)



[DSC-USB USB Signal Digitiser](#)



[ICA Miniature Strain Gauge Amplifier](#)



[SGA Signal Conditioner/Amplifier](#)