



# APPLIED MEASUREMENTS LTD.

## Transducer Specialists...

appmeas.co.uk | info@appmeas.co.uk | +44 (0) 118 981 7339



## DMP 320

### Precision Pressure Transmitter with Fast Response Time

Stainless Steel Sensor

accuracy according to IEC 60770:  
0.1 % FSO

#### Nominal pressure

from 0...100 mbar up to 0...600 bar

#### Output signal

3-wire: 0.1 ... 10 V  
4 ... 20 mA

others on request

#### Special characteristics

- ▶ extremely fast response time  $\leq 0.5$  msec
- ▶ internal sample rate 10 kHz
- ▶ accuracy 0.1 % FSO
- ▶ excellent thermal behaviour
- ▶ outstanding long term stability

#### Optional versions

- ▶ customer specific versions

**DMP 320** stands for speed and precision.

With a response time of  $\leq 0.5$  msec and a sampling rate of 10 kHz, the pressure transmitter was designed for applications, in which an extremely fast and exact pressure measuring is required. Pressure curves, peaks and hits can be monitored and evaluated exactly.

The signal processing of the sensor signal is done by newly developed digital electronics, which detect the signal with a sampling rate of 10 kHz. Sensor-specific deviations such as non-linearity, hysteresis and temperature errors are compensated actively.

#### Preferred areas of use are



Plant and machine engineering



Energy industry



# DMP 320

Precision Pressure Transmitter

Technical Data

Input pressure range												
Nominal pressure gauge	[bar]	-1...0	0.10	0.16	0.25	0.40	0.60	1	1.6	2.5	4	6
Nominal pressure abs.	[bar]	-	-	-	-	0.40	0.60	1	1.6	2.5	4	6
Overpressure	[bar]	5	0.5	1	1	2	5	5	10	10	20	40
Burst pressure $\geq$	[bar]	7.5	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50
Nominal pressure gauge /abs	[bar]	10	16	25	40	60	100	160	250	400	600	
Overpressure	[bar]	40	80	80	105	210	600	600	1000	1000	1000	
Burst pressure $\geq$	[bar]	50	120	120	210	420	1000	1000	1250	1250	1250	
Vacuum resistance		$P_N \geq 1$ bar: unlimited vacuum resistance $P_N < 1$ bar: on request										

Output signal / Supply	
3-wire voltage	0.1 ... 10 V / $V_S = 14 \dots 30 V_{DC}$
3-wire current	4 ... 20 mA / $V_S = 14 \dots 30 V_{DC}$

Performance	
Accuracy <sup>1</sup>	$\leq \pm 0.1$ % FSO
Permissible load	current 3-wire: $R_{max} = 500 \Omega$ voltage 3-wire: $R_{min} = 10 k\Omega$
Influence effects	supply: 0.05 % FSO / 10 V                      load: 0.05 % FSO / $k\Omega$
Long term stability	$\leq \pm 0.1$ % FSO / year at reference conditions
Response time	$\leq 0.5$ msec

<sup>1</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (Offset and Span) / Permissible temperatures	
Tolerance band [% FSO]	$\leq \pm 0.2$ in compensated range -20 ... 80 °C
TC, average [% FSO / 10 K]	$\pm 0.02$ in compensated range -20 ... 80 °C
Permissible temperatures	medium: -40 ... 125°C electronics / environment: -40 ... 85°C storage: -40 ... 100°C

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326

Mechanical stability	
Vibration	10 g RMS (25 ... 2000 Hz)                      according to DIN EN 60068-2-6
Shock	500 g / 1 msec                      according to DIN EN 60068-2-27

Materials	
Pressure Port	stainless steel 1.4404 (316 L)
Housing	stainless steel 1.4404 (316 L)
Option compact field housing	stainless steel 1.4301 (304); cable gland M12x1.5, brass, nickel plated (clamping range 2 ... 8 mm)
Seals	standard: FKM options: EPDM                      others on request
Diaphragm	stainless steel 1.4435 (316 L)
Media wetted parts	pressure port, seals, diaphragm


Miscellaneous	
Current consumption	3-wire voltage: < 30 mA                      3-wire current: < 55 mA
Weight	approx. 200 g
Installation position	any <sup>2</sup>
Operational life	100 million load cycles
CE-conformity	EMC Directive: 2014/30/EU Pressure Equipment Directive: 2014/68/EU (module A) <sup>3</sup>

<sup>2</sup> Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for pressure ranges  $P_N \leq 1$  bar.

<sup>3</sup> This directive is only valid for devices with maximum permissible overpressure > 200 bar

### Wiring diagram

3-wire-system (current / voltage)

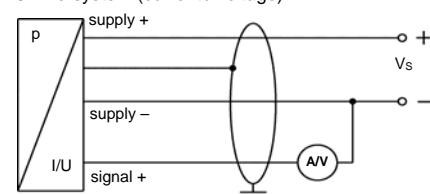


# DMP 320

Precision Pressure Transmitter

Technical Data

Pin configuration					
Electrical connection	ISO 4400	Binder 723 (5-pin)	M12x1 / metal (4-pin)	field housing	cable colour (IEC 60757)
Supply +	1	3	1	IN +	WH (white)
Supply -	2	4	2	IN -	BN (brown)
Signal +	3	1	3	OUT +	GN (green)
Shield	ground pin $\oplus$	5	4	$\oplus$	GNYE (green-yellow)

## Electrical connections (dimensions in mm)

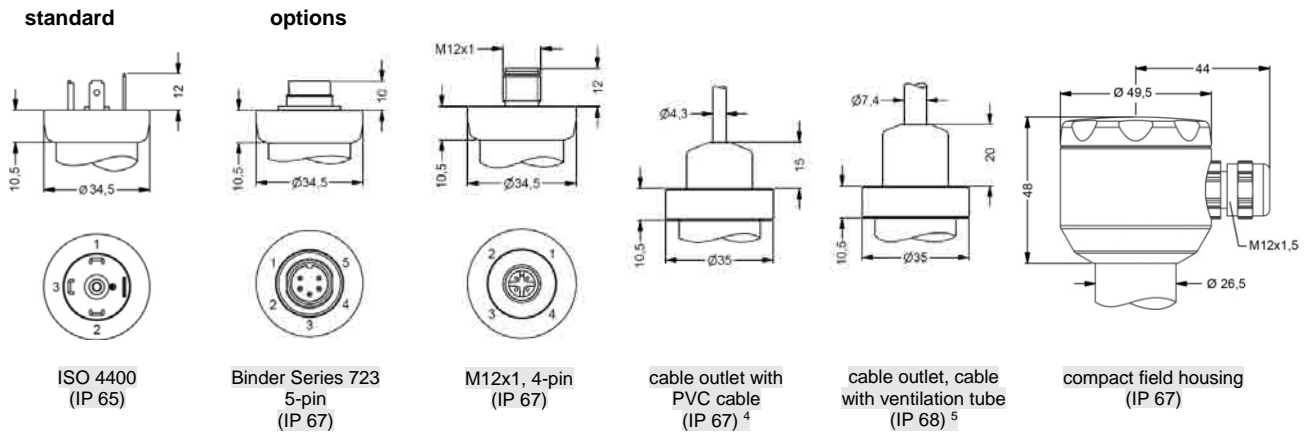


⇒ universal field housing stainless steel 1.4404 with cable gland M20x1.5 (ordering code 880) and other versions on request

<sup>4</sup> standard: 2 m PVC-cable without ventilation tube (permissible temperature: -5 ... 70°C)

<sup>5</sup> different cable types and lengths available, permissible temperature depends on kind of cable

## Mechanical connections (dimensions in mm)

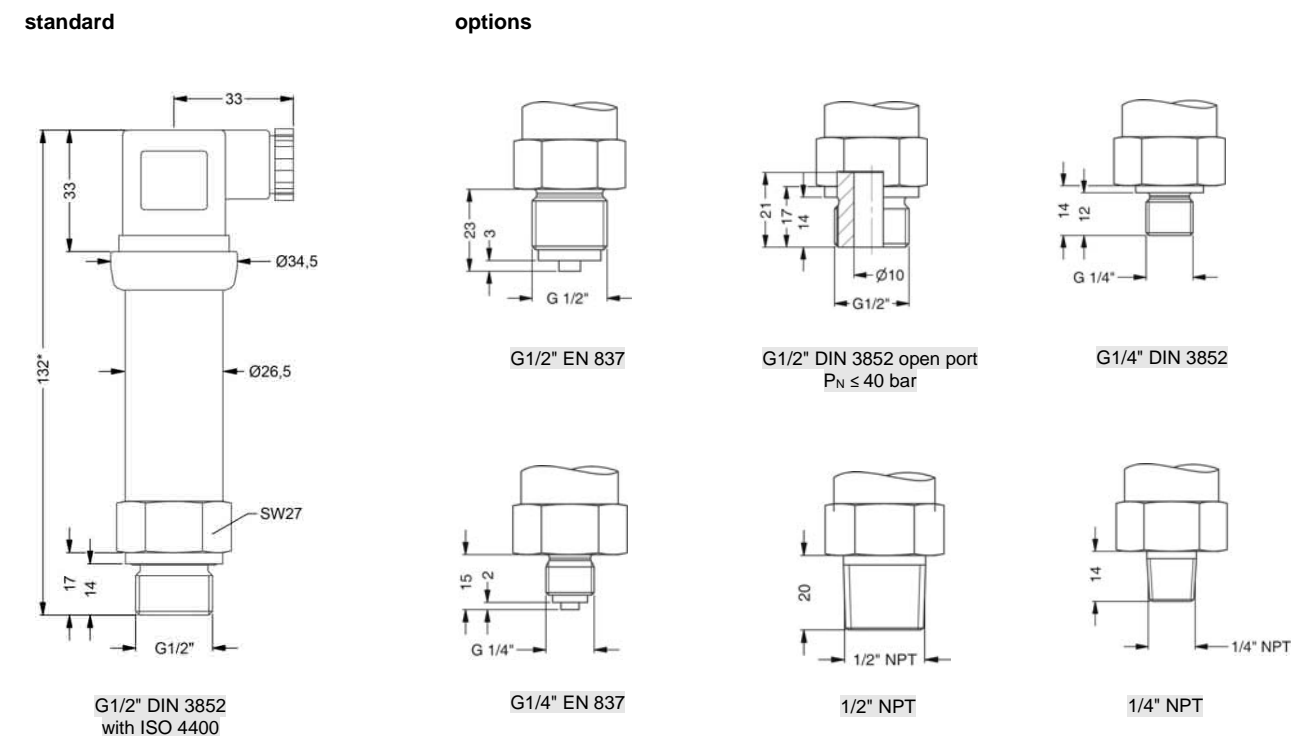

⇒ metric threads and other versions on request

\* for nominal pressure  $P_N > 40$  bar the length of devices increases by 9 mm

